

Chameleon Creative V-Layer Panels

Specifications



Colours

The 9mm PET felt from Chameleon Creative Panels is dyed-through. The color is also visible in the cutout. We have selected 21 colors, with a strong representation of gray tones and brown tones.



White
P001



Dusty white
P002



White marble
P003



Calm grey
P004



Rough grey
P005



Black lava
P006



Flat white
P007



Hare
P008



Canyon
P009



Turmeric
P010



Rust
P011



Tree bark
P012



Magma
P013



Polar ice
P014



Light blue
quartz
P015



Dusk
P016



Pink rose
P017



Garnet
P018



Iguana
P019



Ocean green
P020




Anthracite
P021


General

Size (cm) (total m ²)	Article number	Cut-out code (optional)	Number of panels	Gross weight	Nett weight
118 x 58 (2,74)	11210.160 *	VLO1	4	±11kg	±10 kg
118 x 58 (2,74)	11210.161 *	VLO2	4	±11kg	±10 kg
118 x 58 (2,74)	11210.162 *	VLO3	4	±11kg	±10 kg
118 x 58 (2,74)	11210.163 *	VLO4	4	±11kg	±10 kg
118 x 58 (2,74)	11210.164 *	VLO5	4	±11kg	±10 kg
118 x 58 (2,74)	11210.165 *	VLO6	4	±11kg	±10 kg
118 x 58 (2,74)	11210.166 *	VLO7	4	±11kg	±10 kg
118 x 58 (2,74)	11210.167 *	VLO8	4	±11kg	±10 kg
118 x 58 (2,74)	11210.168 *	VLO9	4	±11kg	±10 kg
118 x 58 (2,74)	11210.169 *	VLO10	4	±11kg	±10 kg


* Provide the color code of the front layer first with the article number, followed by the color code of the back layer, in the request for a quotation or order: [article number + color front + colour back].




VLO1




VLO2




VLO3




VLO4




VLO5




VLO6




VLO7



VLO8



VLO9



VLO10




Technical

Material:	Consists of 100% recyclable Polyethylene terephthalate, including a portion from recycled PET bottles.
Properties:	Acoustic.
Thickness:	Approximately 21.3 mm thick (2x 9 mm bonded, including suspension hardware).
Cut-out:	Features a 14 mm deep v-cut pattern, at a 30-degree angle.
Finish:	Edges are finished with a bevel-cut.
Acoustic value:	Directly to the wall: α_w 0,45 / SAA 0,59 50 mm air gap: α_w 0,75 / SAA 0,74 100 mm air gap: α_w 0,80 / SAA 0,74
Fire resistance:	EN13501: B-s1, d0 (9 mm)
Installation:	Velcro.
Warranty:	2-year warranty.

Technical

1. Surface:	PET felt panel, approximately 18 mm thick
2. Mounting material:	Velcro, approximately 3.3 mm thick

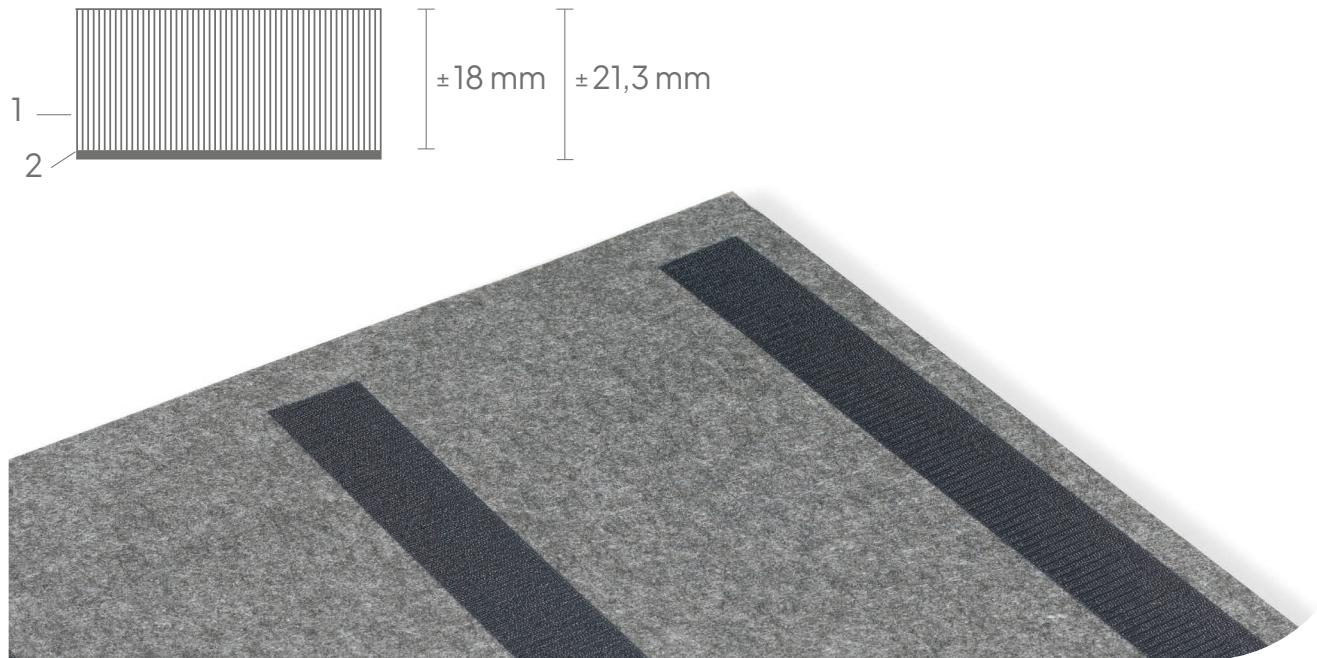

Packaging

Type:	Cardboard
Contents:	4 Chameleon Creative V-Layer Panels, assembly manual
Packaging unit:	1 box
Materials:	Corrugated cardboard, bubble wrap
Dimensions:	Approximately 210 x 620 x 1220 mm

Smit Visual B.V.
Spaarpot 120-122
5667 KZ Geldrop
The Netherlands

T +31(0)40 - 280 85 00
F +31(0)40 - 286 76 15
E info@smit-visual.nl
W chameleonwriting.nl